


Enclosed: 2 Fixing Brackets
4 Screws
4 Rawlplugs

- This is a guide only, fixing plates can be fixed closer together if a more solid fixing is achievable.
- The fixings supplied should suffice but hollow fixings may be required for dry lined walls.
- Beams are non-combustible but recommended to be fitted a minimum of 250mm above the stove to underneath of beam.
- Use a spirit level across fixing plates for a perfect install.
- Lower beam onto fixing plates so 45° bevel locks into place.

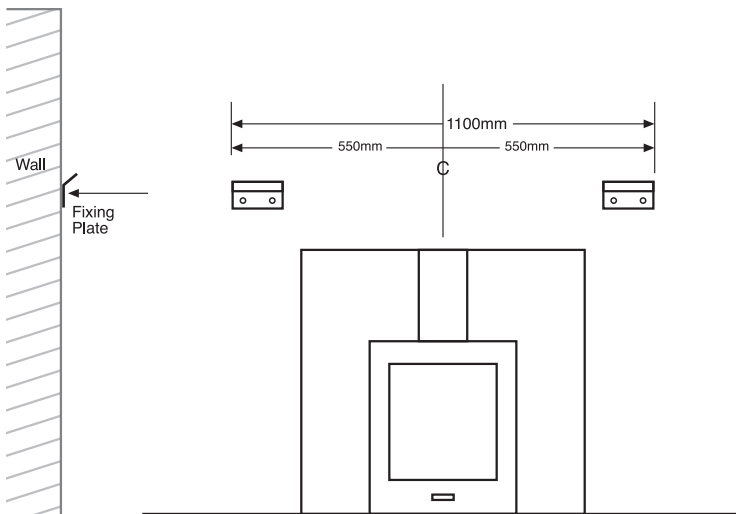


PTO

Thank you for purchasing an OER product

Please contact us for further assistance

☎ 01782 319350 ✉ sales@oerfireplaces.com



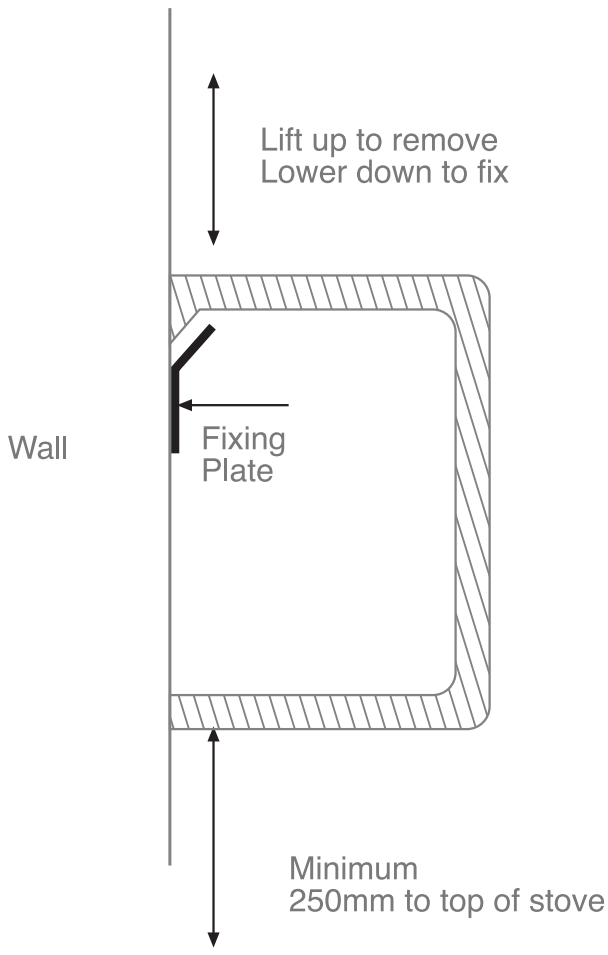

Thank you for purchasing an OER product

Please contact us for further assistance

☎ 01782 319350 ✉ sales@oerfireplaces.com

